



MODULAR GTC - OFFICE

Front

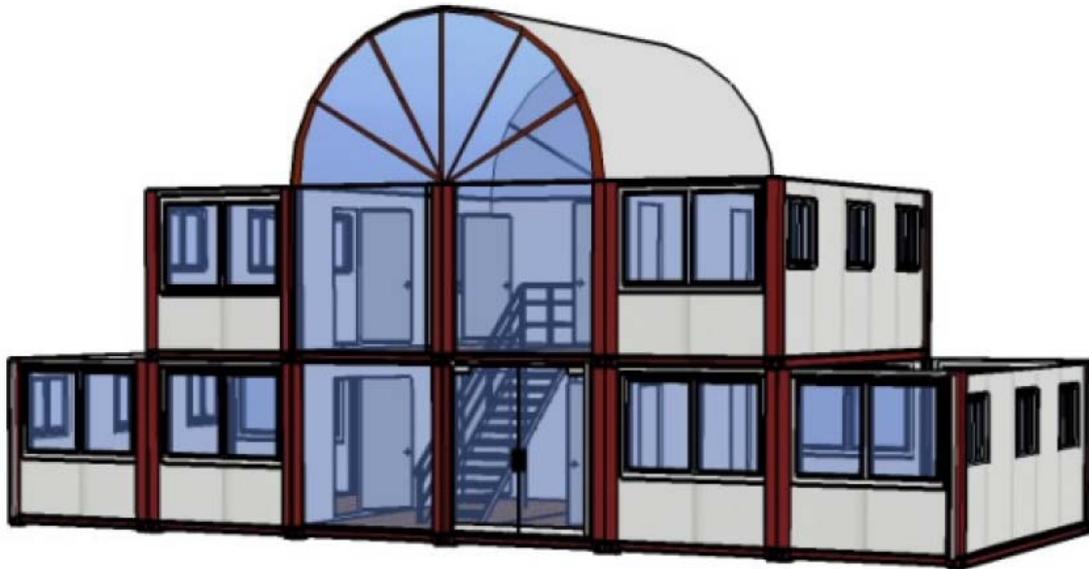

Backside

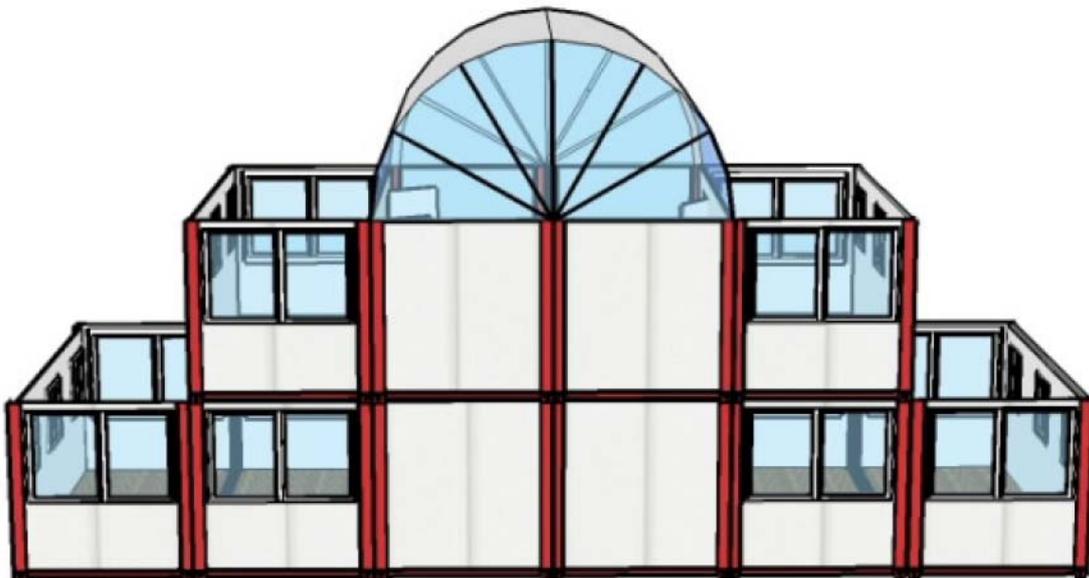

Special advantages

- Set up and change location in less than 1 week
- Very strong isolation , double glass windows, 50 or 80 mm foam insulation
- Scalable in size , as large as you want
- Very limited building regulations
- No yearly building taxes (movable)
- Very limited insurance
- Exceptional low cost against traditional (mostly 1/5 against traditional building)
- Resistant on earth quakes, etc
- Very nice promotion and show for customers

Gtc General Tents and Containers

Tel: Be : +32.(0) 9.348 48 48 NI : +31.(0)115. 788 118 Lu : +35. (0)22.7860 237 Pl : +48.(0)91.8871 044
Mail : info @generaltents.com

Ref : mic259-1814/ 1815

Mic / Gen.Tents.Comp drawing

II. PRODUCT INTRODUCTION

Modular container is combined by sandwich panels ·

All materials are packed in CKD (completely knocked down), assemble & disassemble easily ·

With flexible design and structure, modular container house can be made any decorations inside and ·
outside the unit, and it can be widely used as accommodations, offices, conference rooms, toilets, shelters etc.

Modular containers can be combined into a big space house, and stack to 4 floors, called prefab house, ·
prefab hotel, prefab factory, prefab school, etc.

Modular container can be moved from place to place and easily clean and maintain. ·

III. SPECIFICATION:

1. Size

Exterior: 6058mm x 2438mm x 2591mm (each container, total 10 containers) ·

Or

7000mm x 3000 mm (each container ; total = 10 containers)

2. Floor

Channel steel main beams (sandblasted), galvanized, 2 times painting ·

Channel steel cross member (sandblasted), galvanized, 2 times painting ·

ISO shipping container corners ·

15mm bamboo plywood floor board (or waterfree alternates) ·

3mm aluminum plastic panel(the middle two containers of the second floor) ·

3. Wall 50mm color-coated steel-EPS (Expanded Polystyrene) sandwich panels ·

Linked with tongue-and-groove solution ·

4. Removable pillar Steel cold-formed pillar, well painted ·

Linked with roof and floor with screws ·

5. Roof panel the middle two containers of the second floor don't have roof)

Galvanized steel structure, 2 times painting ·

ISO shipping container corners ·

1 pieces of whole 2mm thickness FRP (Fiberglass Reinforced Plastic) panel on each side ·

50mm thickness EPS Rigid Foam as thermal insulation core ·

Color bond sheet fixed on steel structure ·

Tent 6. Steel tube ·

2mm thickness FRP (Fiberglass Reinforced Plastic) panels ·

(double insulation : mark separately /as can be in one single piece ?)

7. Door, 8 pieces

50mm color-coated steel-EPS sandwich door panel. ·

Aluminum door frame ·

Stainless steel lock ·

Size:875*2000mm ·

8. Glass door,1 piece

Aluminum alloy door frame ·

Size:2300*2300mm ·

9. Sliding window ,24 pieces

PVC coated steel frame ·

Double glass ·

With blinds ·

Size: 1500*1000mm , 12 pieces; 1000* 875mm , 12pieces.

10. French window ,3 pieces

Aluminum alloy door frame ·

Size:2300*2300mm ·

11.Stairs(with guardrail),1 set

12. Fittings

Seal glue ·

Screws and rivets ·

Spare paint ·

Packing material ·

IV. Price

No Items unit price Quantity Amount

1 Containers (ten sets) :

a/container price : 6 x

b/frame container price (middle): 4 x

2 Tent

3 Stairs with guardrail

EXW price for 1 unite :

V. Payment Terms

Deposit 50% paid, balance by T/T before shipment ·

·

VI. Delivery time:

* 6-8 weeks

* Set up : 1 week

VII. Packing & Shipping

All items are packed in CKD (completely knock down) ·

1 sets container house packed in 2*40HQ shipping containers ?

GTC – GeneralTents / a mic – etap company

Tel: +32 9 348 48 48 Fax: +32.9 348 95 16 Email: info@generaltents.com

All specifications are for indication only , and can be modified at all times

None of above details and drawings can be copied or imaged, reproduced, without prior written aggregation of mic .